


Suppression Capacitors (Quadripole) Class X1/Y2 AC 275/250 V

Dimensions in mm

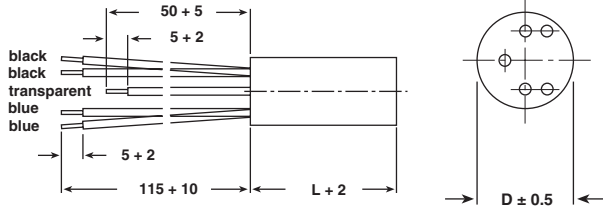

FEATURES:

Product is completely lead (Pb)-free
Product is RoHS compliant



TERMINALS:

Insulated stranded copper wire, type LiY 0.5 mm²
(or AWG 20) ends stripped and tinned



RoHS
COMPLIANT


RATED VOLTAGE:

AC 275 V, 50/60 Hz --> X1
AC 250 V, 50/60 Hz --> Y2

COATING:

Cylindrical plastic case, epoxy resin sealed, flame retardant,
UL-class 94V-0

CIRCUIT DIAGRAMM:



RATED CURRENT:

≤ 4 A: 0.5 mm² (or AWG 20)

TECHNICAL DATA:

See page 73 (Document Number 27001)

CAPACITANCE X-VALUE	CAPACITANCE Y-VALUE	RATED CURRENT at + 40 °C	DIMENSIONS D x L (mm)	WEIGHT (g)	QUANTITY PACKAGE (pcs)	ORDERING CODE*
0.022 µFX1	2 x 2700 pFY2	4 amps	12 x 27	9.5	500	F1740-322-5511-E3
0.027 µFX1	2 x 2700 pFY2	4 amps	12 x 27	9.6	500	F1740-327-5511-E3
0.033 µFX1	2 x 2700 pFY2	4 amps	12 x 35	10.0	500	F1740-333-5511-E3
0.047 µFX1	2 x 2700 pFY2	4 amps	12 x 35	10.3	500	F1740-347-5511-E3
0.068 µFX1	2 x 2700 pFY2	4 amps	14 x 35	12.4	400	F1740-368-5511-E3
0.1 µFX1	2 x 2700 pFY2	4 amps	16 x 35	14.8	300	F1740-410-5511-E3
0.15 µFX1	2 x 2700 pFY2	4 amps	18 x 35	18.0	300	F1740-415-5511-E3
0.22 µFX1	2 x 2700 pFY2	4 amps	20 x 35	20.0	250	F1740-422-5511-E3
0.27 µFX1	2 x 2700 pFY2	4 amps	20 x 50	29.0	200	F1740-427-5511-E3
0.33 µFX1	2 x 2700 pFY2	4 amps	20 x 50	30.5	200	F1740-433-5511-E3
0.47 µFX1	2 x 2700 pFY2	4 amps	20 x 50	40.0	150	F1740-447-5511-E3
0.027 µFX1	2 x 4700 pFY2	4 amps	12 x 35	9.6	500	F1740-327-5581-E3
0.033 µFX1	2 x 4700 pFY2	4 amps	12 x 35	10.0	500	F1740-333-5581-E3
0.047 µFX1	2 x 4700 pFY2	4 amps	14 x 35	10.3	400	F1740-347-5581-E3
0.068 µFX1	2 x 4700 pFY2	4 amps	14 x 35	12.4	400	F1740-368-5581-E3
0.1 µFX1	2 x 4700 pFY2	4 amps	16 x 35	14.8	300	F1740-410-5581-E3
0.15 µFX1	2 x 4700 pFY2	4 amps	18 x 35	18.0	300	F1740-415-5581-E3
0.22 µFX1	2 x 4700 pFY2	4 amps	20 x 35	20.0	250	F1740-422-5581-E3
0.27 µFX1	2 x 4700 pFY2	4 amps	20 x 50	29.0	200	F1740-427-5581-E3
0.33 µFX1	2 x 4700 pFY2	4 amps	20 x 50	30.5	200	F1740-433-5581-E3
0.47 µFX1	2 x 4700 pFY2	4 amps	25 x 50	40.0	150	F1740-447-5581-E3

* With mark, the ordering code is F1740-...-54-E3.

The suffix "E3" is used for the RoHS-compliant version, although in most cases this is the only available version.

F1740-5511 and F1740-5581




Vishay Roederstein

Suppression Capacitors (Quadripole)
Class X1/Y2 AC 275/250 V

APPROVALS

COUNTRY	SPECIFICATION	ELECTRICAL VALUES	APPROVAL REFERENCE	APPROVAL MARK
U.S.A. (for AC 250 V)	UL 1283	0.22 μ FX - 0.47 μ FX + 2 x 2700 pFY - 2 x 0.027 μ FY	E 76297	
CB TEST-CERTIFICATE		0.22 μ FX1 - 0.47 μ FX1 + 2 x 2700 pFY2 - 2 x 0.027 μ FY2	CH 676-A1	
Switzerland (for AC 275/250 V)	EN 132 400 IEC 60384-14, 2nd edition	0.22 μ FX1 - 0.47 μ FX1 + 2 x 2700 pFY2 - 2 x 0.027 μ FY2	96.1 10036.02	
This approval mark together with the CB-Certificate replace all national approval marks of the following countries (they have already signed the CB-Agreement):				
Austria	Belgium	Denmark	Finland	Sweden
France	Germany	Ireland	Italy	Switzerland
Netherlands	Israel	Portugal	Spain	Great Britain
Japan	Norway	China	Poland	Czech. Republic
Singapore	Rep. of Korea	Hungary	Iceland	Slovenia

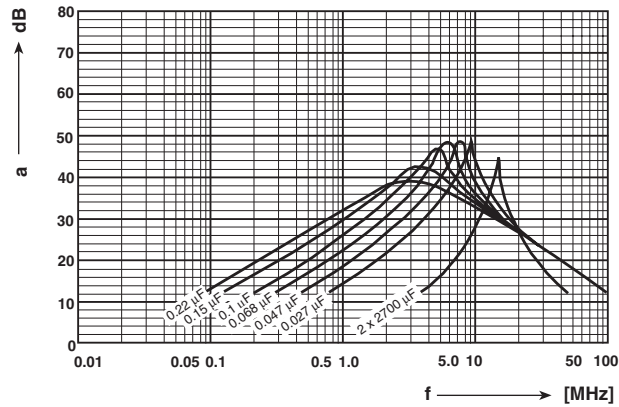

Insertion loss (Averag) of 1740-5511/5411 Class X1Y2.
Measurement at 60 Ω -System with parallel leads (50 mm).



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.