


SWITCH TYPE	PUSH SWITCH	MODEL NO.	BS800L
1. Functional spec.			
1.1 Rated Voltage	DC30V	1.6 Free Position	
1.2 Rated Current	0. 1A	1.7 Operating Position	
1.3 Contact Resistance	≤50mΩ (Initial value)	1.8 Position Travel	
1.4 Operating Force	160±80gf	1.9 Return Force	
1.5 Bounce Time		1.10	
2. Reliable Rating			
2.1 Mechanical Life	100, 000 cycles	2.5 Soldering Technic	Hand Soldering
2.2 Electrical Life	10, 000 cycles	2. 6 Operating Temper	-25℃ - +65℃
2.3 Insulation Resistance	≥100M Ω DC250V	2.8 Ambient Humidity Used	<85%RH
2.4 Withstand Voltage	AC250V 1 minute	2.8	

3. Dimension Drawing

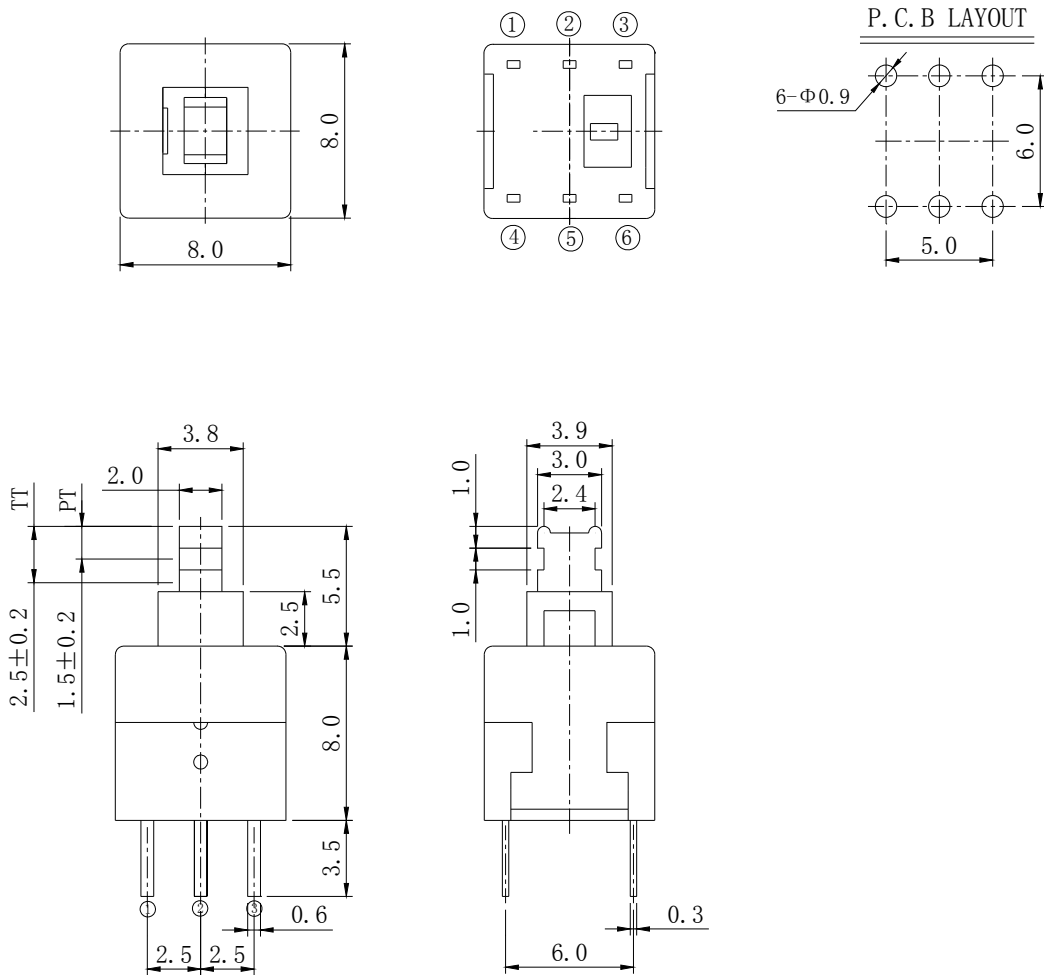

Revision	Description		Date	Revisor			
Drawing No.	C/0		Tolerance	±0. 2			
Drawing Model.	SPECIFICATION OF STANDARD TYPE		Unit	mm			
Prepared	zhentong, Lai	Reviewed	haitao, You	Approved	jianying, Qiu	Effective date	