


Model & explanation



1. Power supply voltage: 85%-110% rated voltage 36V、110V、127V、220V、380V 50/60HZ DC24V (Special Voltage is available with order).
2. Counting range: 1-9999 ($\times 1 \times 10 \times 100$) multiple dial switch setting.
3. Power consumption: $\leq 3W$.
4. Counting mode: a. Contact signal input: relay, limit switch b. Electrical level signal input: Positive pulse level (4V-30V) c. Sensor signal input: photoswitch approach switch.
5. Max. counting speed: 30pcs/s.
6. Counting pulse width: 15ms.
7. Contact capacitance: AC250V 5A; DC28V 5A.
8. Mechanical endurance: 10^6 times.
9. Electrical endurance: 10^6 times.
10. Ambient temperature: $-5^{\circ}C$ - $+40^{\circ}C$.

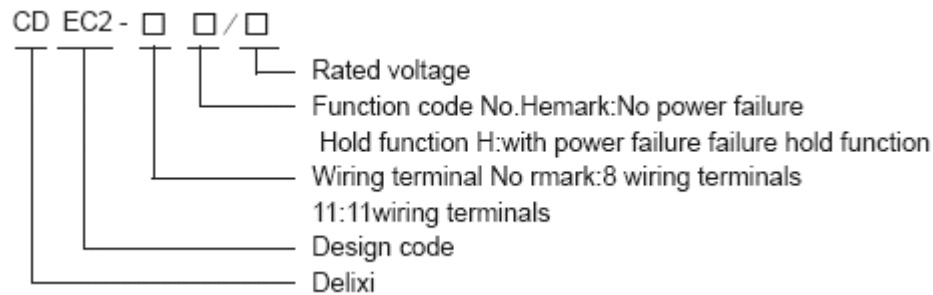