

CL-SM3P

High Efficiency, High Quality PV Module



Electrical Characteristics	CL-SM3P
Maximum power (Pmax)	3W
Voltage at Pmax (Vmp)	17.6 / 8.8V
Current at Pmax (Imp)	0.17 / 0.34A
Open-circuit voltage (Voc)	21.8 / 10.9V
Short-circuit current (Isc)	0.18 / 0.36A
Temperature coefficient of Voc	-(0.40 ± 0.05)% / °C
Temperature coefficient of Isc	(0.065 ± 0.01)% / °C
Temperature coefficient of power	-(0.5±0.05)% / °C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	±3%
Cells	multicrystalline silicon solar cell
No. of cells and connections	36(2x18) / 18(2x9)
Module Dimension	251mm[9.88in.]x140mm[5.51in.]x17mm[0.67in.]
Weight	0.5kg[1.1lbs]

* STC:Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
 * Specifications are subject to change without notice at any time.



Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module, passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacture is certified for ISO 9001:2000


Product's Guarantee

- 15 years module power output no less 90%
- 20 years module power output no less 80%


Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications


Module Diagram

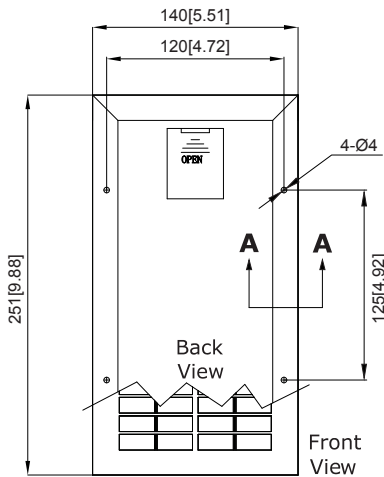

Dimensions in brackets are in inches.
 Un-bracketed dimensions are in millimeters.
 Unit:mm[in.]





Junction Box
 Top View (Lid open)



Section A-A

I-V Curves

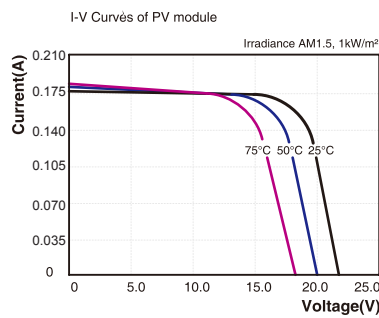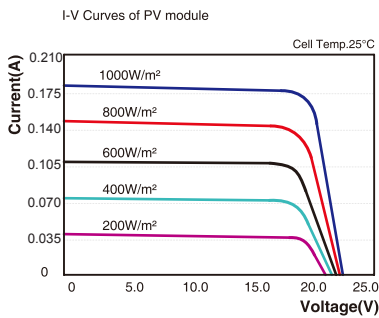

CELLEVIA POWER