



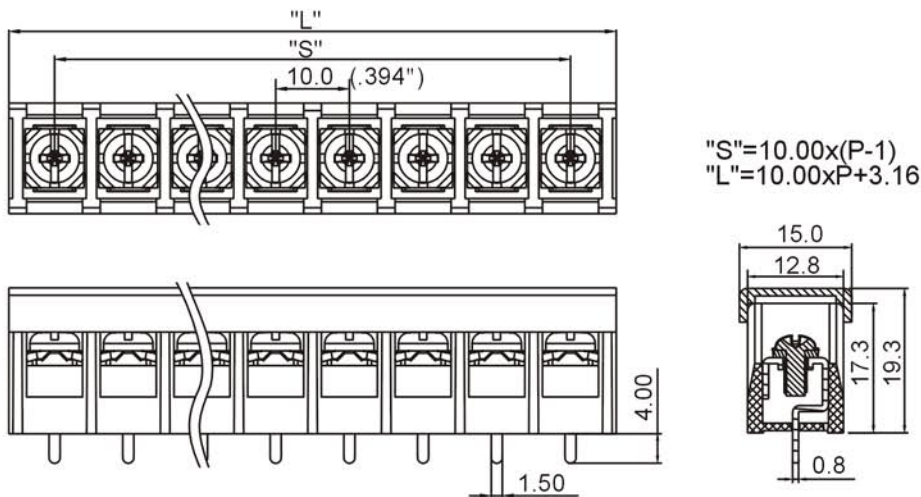

# DEGSON ELECTRONICS CO., LTD.

## Product Specification

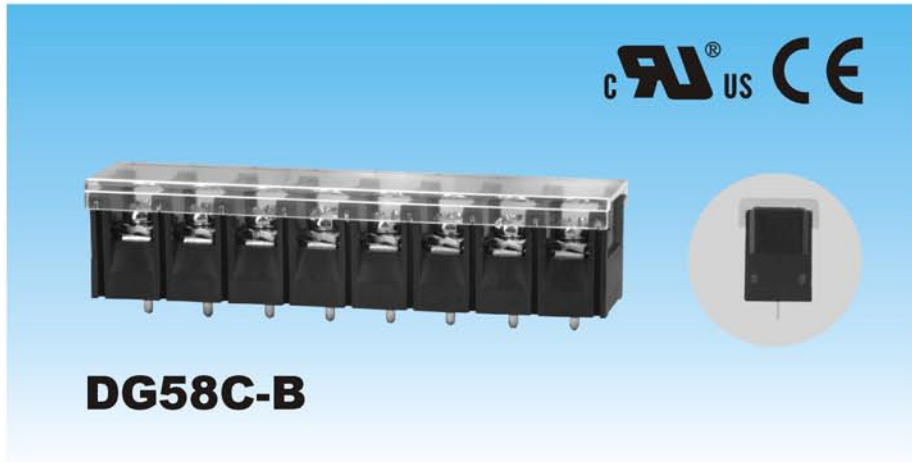

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.16	33.16	43.16	53.16	63.16	73.16	83.16	93.16	103.16	113.16	123.16	133.16	143.16	153.16
S(mm)	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	163.16	173.16	183.16	193.16	203.16	213.16	223.16	233.16	243.16	253.16	263.16			
S(mm)	150.00	160.00	170.00	180.00	190.00	200.00	210.00	220.00	230.00	240.00	250.00			

### Materials

Housing:	PA66+23%GF, UL 94V-0
Terminal:	Brass,0.8t,Tin-Plated
Screw:	Steel,M4 Ni-Plated

### Capability

Rated:	300V / 20A
Temp.Range:	-40°C~+105°C
Withstand Voltage:	AC2000V / 1Min
Insulation Resistance:	500MΩ / DC500V
Wire Range:	22-12AWG
Max.Torque Value:	1.2N.m 10.6Lb.in


## HOW TO ORDER:



Series No. No. of Pole

### Color

1 Gray	5 Orange	9 White
2 Blue	6 Red	
3 Black	7 Trans-parent	
4 Green	8 Yellow	



	<b>DEGSON ELECTRONICS CO.,LTD.</b>
NAME	<b>DG58C-B</b>